

AUTOMOTIVE BATTERIES DATA SHEET

Model: MAS-LX60D26SD (L)

Features

- Polypropylene Container with ribs to withstand extreme road conditions and vibration resistant.
- Ca- Se Alloy System ensures the battery can withstand the temperate environment and high under-bonnet temperatures and minimised Water Loss.
- Optimized Negative paste recipe for fast charge acceptance.
- Low Self Discharge.
- Ready-to-use: Batteries delivered factory-charged in ready-to-use condition



Battery Applications

Automobiles

TECHNICAL SPECIFICATIONS

Model	MAS-LX60D26SD (L)	
Rated Capacity at 20 hour Rate		60Ah
Battery Nominal Voltage		12V
Dimensions	Length	258±2mm
	Width	171±2mm
	Height up to Terminal	223±2mm
Fully Charged Battery	Electrolyte Specific Gravity at 27°C	1.260±0.005
	Battery Weight (with electrolyte)	17.30Kg.
Terminal Details		'T2'
Lay Out Details		Left

AUTOMOTIVE BATTERIES DATA SHEET


BATTERY CHARGING

Model	MAS-LX60D26SD (L)	
Constant Current Charging (CC)	Maximum Charging current	6.0

ELECTRICAL PERFORMANCE

Capacity at 27°C	20 Hour Rate (Ref.)	60Ah
	5 Hour Rate	48Ah
Reserve Capacity		90 Minutes
Cold Cranking Performance @ -18 deg.C		370A
Water Loss		< 0.9g/Ah

Open circuit Voltage & Specific Gravity Vs SOC

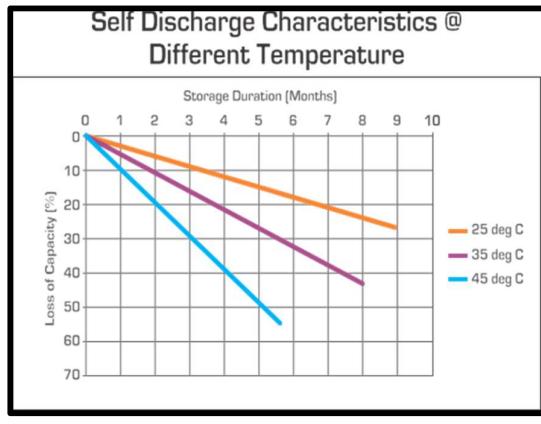

State of Charge	Specific Gravity	Voltage
100%	1.260	12.7V
75%	1.225	12.4V
50%	1.190	12.1V
25%	1.155	12.0V
0%	1.120	11.8V

Zunax Energy Products LLP certified by Aambitious Assessments Pvt. Ltd.



Zunax Energy Products LLP
Sy No 806, Farooq Nagar Mandal, Mahboob Nagar, Burgula Village,
Dist. Rangareddy, Telangana - 509202 India