

AUTOMOTIVE BATTERIES DATA SHEET

Model:MAS-MX35B20HD(L)

Features

- Polypropylene Container with ribs to withstand extreme road conditions and vibration resistant.
- Ca-Ca Alloy System ensures the battery can withstand the temperate environment and high under-bonnet temperatures and minimized Water Loss.
- Optimized Negative paste recipe for fast charge acceptance.
- Low Self Discharge.
- Ready-to-use: Batteries delivered factory-charged in ready-to-use condition



Battery Applications

Automobiles

TECHNICAL SPECIFICATIONS

Model	MAS-MX35B20HD(L)	
Rated Capacity at 20 hour Rate	35Ah	
Battery Nominal Voltage	12V	
Dimensions	Length	195±2mm
	Width	127±2mm
	Height up to Terminal	222±2mm
Fully Charged Battery	Electrolyte Specific Gravity at 27°C	1.260±0.005
	Battery Weight (with electrolyte)	10 Kg.
Terminal Details	'T1'	
Lay Out Details	Left	

AUTOMOTIVE BATTERIES DATA SHEET


BATTERY CHARGING

Model	MAS-MX35B20HD(L)	
Constant Current Charging (CC)	Maximum Charging current	3.5

ELECTRICAL PERFORMANCE

Capacity at 27°C	20 Hour Rate (Ref.)	35Ah
	5 Hour Rate	28Ah
Reserve Capacity		50 Minutes
Cold Cranking Performance @ -18°C		260A
Water Loss		< 0.9g/Ah

Open circuit Voltage & Specific Gravity Vs SOC

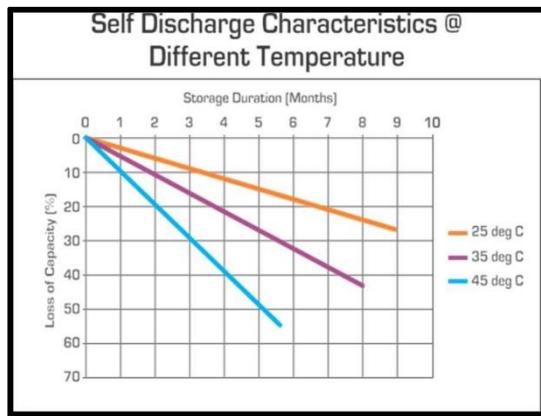

State of Charge	Specific Gravity	Voltage
100%	1.260	12.7V
75%	1.225	12.4V
50%	1.190	12.1V
25%	1.155	12.0V
0%	1.120	11.8V

Zunax Energy Products LLP certified by Aambitious Assessments Pvt. Ltd.



Zunax Energy Products LLP

Sy No 806, Farooq Nagar Mandal, Mahboob Nagar, Burgula Village,
Dist. Rangareddy, Telangana - 509202 India